


- Operation with adjustable angled and positioned 3 drillers.




- The driller detail special to profile process is shown on machine panel.

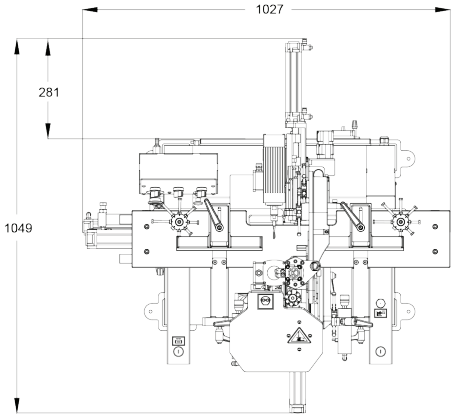

General Features

- Water slot opening on PVC profiles shown on Image 1.
- Practical operation thanks to versatile stoppers.
- Practical adjustment with rotating mechanical support plates.
- Hydropneumatic pistons to adjust progress speed.



H: 1650 mm
W: 1020 mm
L: 1100 mm



230 V
L1-N-PE
50 / 60 Hz
1.1 kW



150 kg



6-8 Bar
24 l / min




D1: 5.2 mm
D2: 8 mm
mov: 18000 mm



a max: 140 mm

h max: 140 mm
h min: 40 mm

Profile shape to be processed.

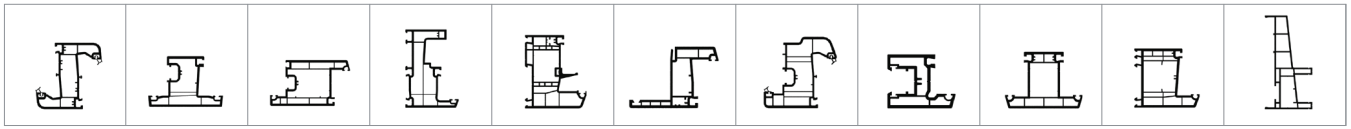

- *Image1*