




LD 2010

Sash and Door Milling Machine





- User-friendly interface.
- Parameters are set easily, profile information can be inserted from screen.
- Operates with Cf card.



- The profile is fixed with clamp gab which is positioned with servomotor. All operations are made by pressing to start button according to the values entered on screen or come from barcode reader.

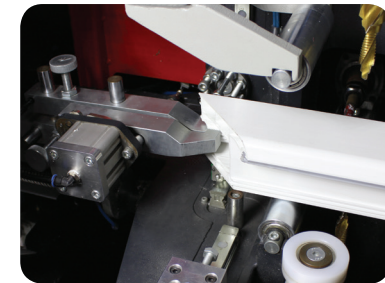


- Handle and espagnolette hole opening on sash profiles with reinforcement steel.



- Handle, cylinder lock and espagnolette hole opening on door profiles with reinforcement steel.



- Sliding pool handle, sliding flat handle and espagnolette hole opening on sliding profiles without reinforcement steel.

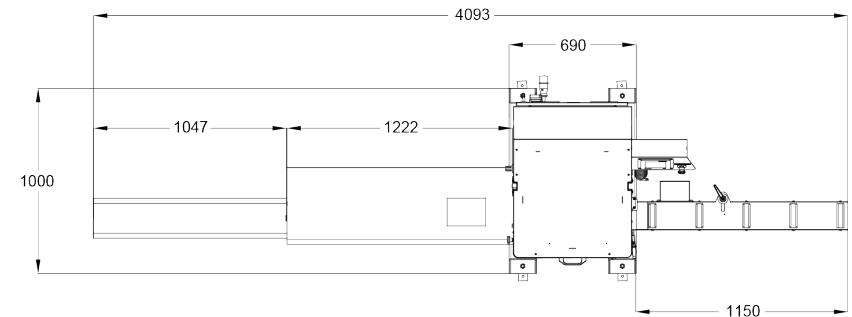

| | | | | | | |
|---|---|---------------|--------------------------------|--|---|--|
| <p>H: 1800 mm W: 3050-4100 mm L: 1100-1000 mm</p> | <p>230 V L1-N-PE 50 / 60 Hz 2,25 kW</p> | <p>545 kg</p> | <p>6-8 Bar 150 l / min</p> | <p>Ød: 23 mm Ød: 13 mm L: 150 mm</p> | <p>Ød: 12 mm L: 93,5 n: 18000 rpm</p> | <p>a [max.: 145 mm min.: 40 mm h [max.: 135 mm</p> |
|---|---|---------------|--------------------------------|--|---|--|